

PORTA-GANTRY® RAPIDE 250-1000



Unique, ultra-light & rapidly deployable gantry that provides a versatile lifting solution for goods and personnel.



250 - 1000KG
WLL



1-2
Persons



33 - 45KG
Compact Storage



EN795

(S) = Small (M) = Medium (T) = Tall (see table)

The **PORTA-GANTRY RAPIDE** adds exciting new dimensions to the **PORTA-GANTRY** family. A patented gantry that can be assembled in under 60 seconds for both goods and personnel lifting (man-ride) applications.


QUICK RELEASE PINS

Quick assembly with ball lock pins, no bolts or tools required



STOW'N'GO

A handy storage container for safe shipping and transportation (PGR 500 only)

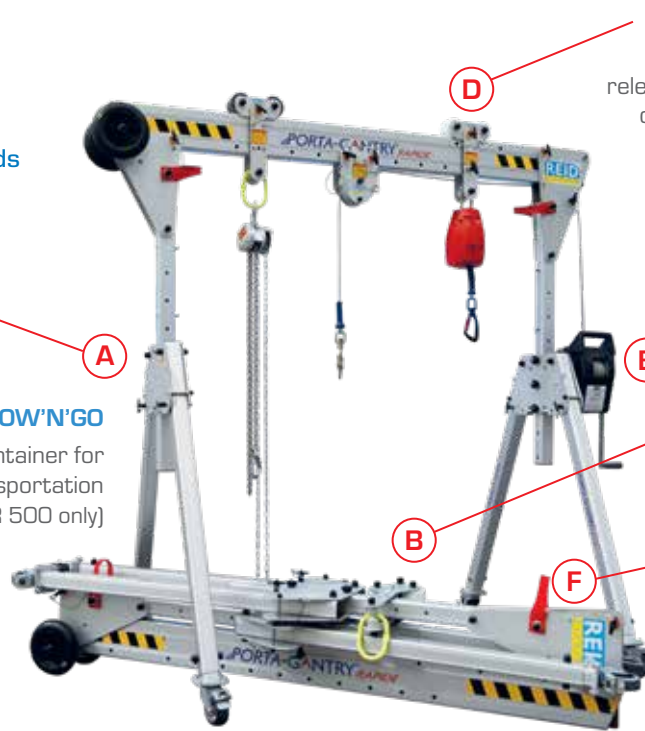

LOAD TROLLEY

Innovative quick release gated trolley or sheave carrier fitted in seconds



ASSEMBLY VIDEO

RAPID ATTACHMENTS

Winching and fall arrest accessories can be easily added without the need for tools



COMPACT

Frames easily fold onto beam, forming compact stowable unit. Easily fits into a typical service van

TRANSPORTABILITY

Easily transported by 1 person with integrated wheel and carry-handle or carried by 2 persons



PORTA-GANTRY RAPIDE 250-1000 Information:

- **GOODS WLL** Up to 1000kg
- **PERSONNEL WLL** Up to 500kg positioning depending on model, 150kg fall arrest
- **HEIGHT ADJUSTMENT** Range 500 to 900mm (see table)
- **3 PERSON FALL ARREST** In conformity with PD CEN/TS16415:2013 (see table)
- **1 PERSON FALL ARREST** EN795:2012 certified - as part of an EN363 compliant system and in conformity with ANSI Z359.18-17* and AS/NZS 5532:2013
- **ROPE ACCESS** Conforms to IRATA International Code of Practice for industrial rope access
- **ATEX** All models suitable for use in ATEX Zone 2 explosive

- **atmospheres.** ATEX Zone 1 is available as an upgrade PGR 500 only
- **LIGHTWEIGHT & PORTABLE** Within manual handling guidelines, weighing from only 33kg for PGR500 and 45kg for PGR1000
- **CONFIGURATIONS** Range of beam lengths up to 4m and configurations available
- **GATED TROLLEY** Mounted in seconds, now with reduced head height
- **FOOTINGS** Height adjustable legs - 2 x 50mm adjustment on each leg with castors or levelling foot options
- **BEAM HOLES** Sheave carrier and Trolley lock off holes across the full length of the beam

E&OE

* ANSI Z359.18-17 applies to 2m and 2.3m beams on PGR500 and full range of PGR1000

Patented & registered designs.

