



500KG
WLL


1 Person
Assembly

Customised
& Bagged

EN795

No. 1 for Lightweight, Portable & Safe Lifting Solutions

Type W Dimensions

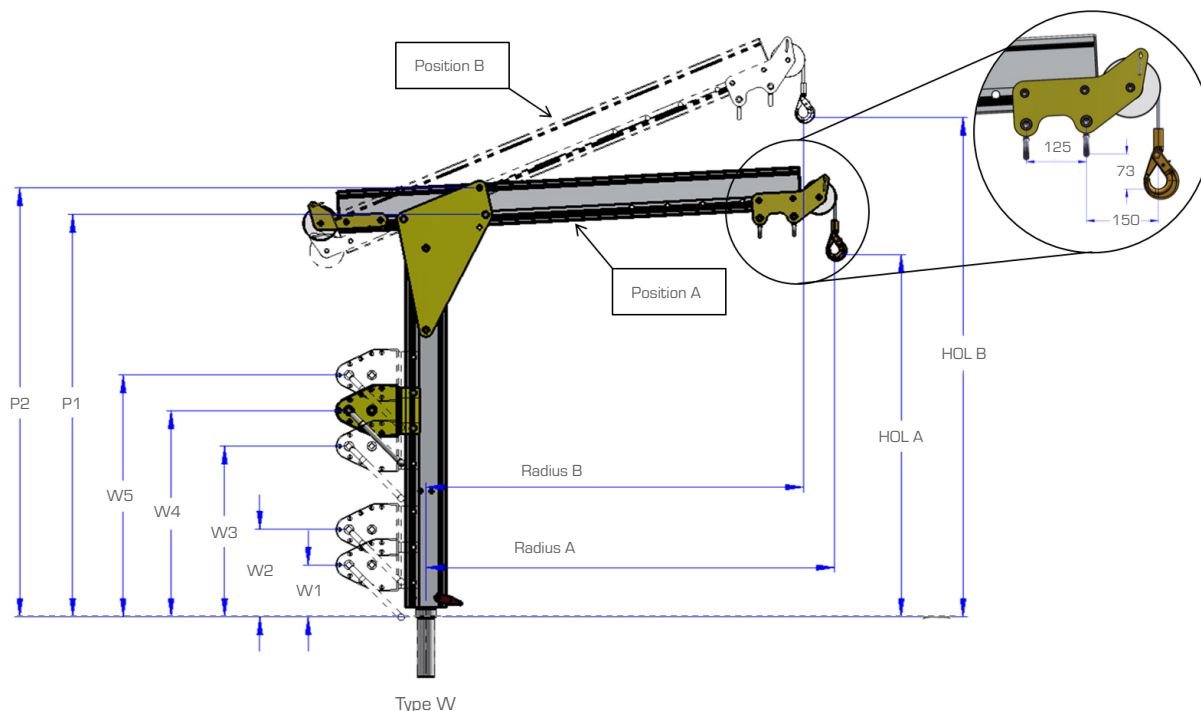

Beam Option	1		2		3		4	
Position	A	B	A	B	A	B	A	B
Radius (mm)	1000	925	1200	1110	1600	1478	2000	1850
Load Rating 1 (kg)	500		400		300		250	
Load Rating 2 (kg)	500		500		375		300	
Weight (kg)	12		13		16		19	

Dimensions are to hook on Winched type above.

Column Option	Height of Lift (HOL) (mm)								Weight (kg)	Winch Position		P1	P2
	A	B	A	B	A	B	A	B		W1	W2		
1	839	1151	839	1227	839	1380	839	1532	20	W1	190	982	1081
										W2	320		
2	1019	1331	1019	1407	1019	1560	1019	1712	21	W1	190	1162	1261
										W2	320		
										W3	625		
3	1329	1641	1329	1717	1329	1870	1329	2022	23	W1	190	1472	1571
										W2	320		
										W3	625		
										W4	755		
4	1644	1956	1644	2032	1644	2185	1644	2337	25	W3	625	1787	1886
										W4	755		
										W5	885		
5	1954	2266	1954	2342	1954	2495	1954	2647	28	W5	885	2097	2196



IRATA Member

LEEA Member


ISO 9001

ISO 14001

OHSAS 18001

The Queen's Award for Enterprise: International Trade

Type S Dimensions

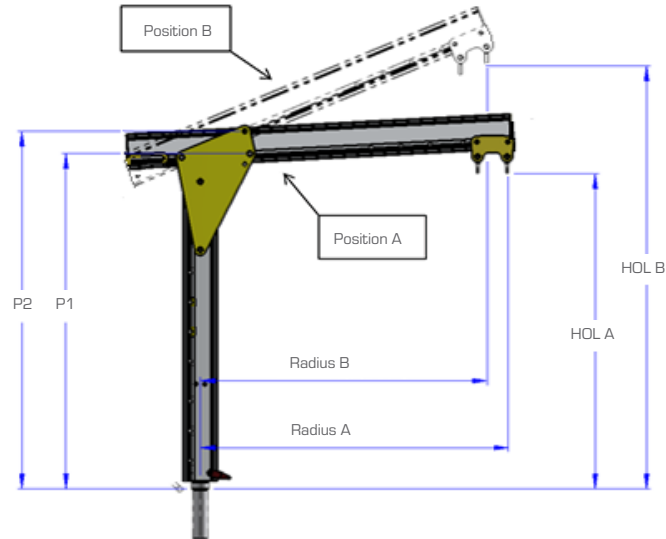

Type S

Beam Option	1		2		3		4				
Position	A	B	A	B	A	B	A	B			
Radius (mm)	850	775	1050	960	1450	1328	1850	1700			
Load Rating 1 (kg)	500		400		300		250				
Load Rating 2 (kg)	500		500		375		300				
Weight (kg)	10		11		14		17				
Column Option	Height of Lift (HOL) (mm)								Weight (kg)	P1	P2
	A	B	A	B	A	B	A	B			
1	912	1224	912	1300	912	1453	912	1605	20	982	1081
2	1092	1404	1092	1480	1092	1633	1092	1785	21	1162	1261
3	1402	1714	1402	1790	1402	1943	1402	2095	23	1472	1571
4	1717	2029	1717	2105	1717	2258	1717	2410	25	1787	1886
5	2027	2339	2027	2415	2027	2568	2027	2720	28	2097	2196

Custom Variations Available:

TYPE VS

Sliding beam T-DAVIT with Variable radius Shackles



TYPE VW

Variable Winched sliding beam T-DAVIT with shackles & ergonomically positioned winch (upper or lower)



TYPE T

Geared Trolley T-DAVIT

